


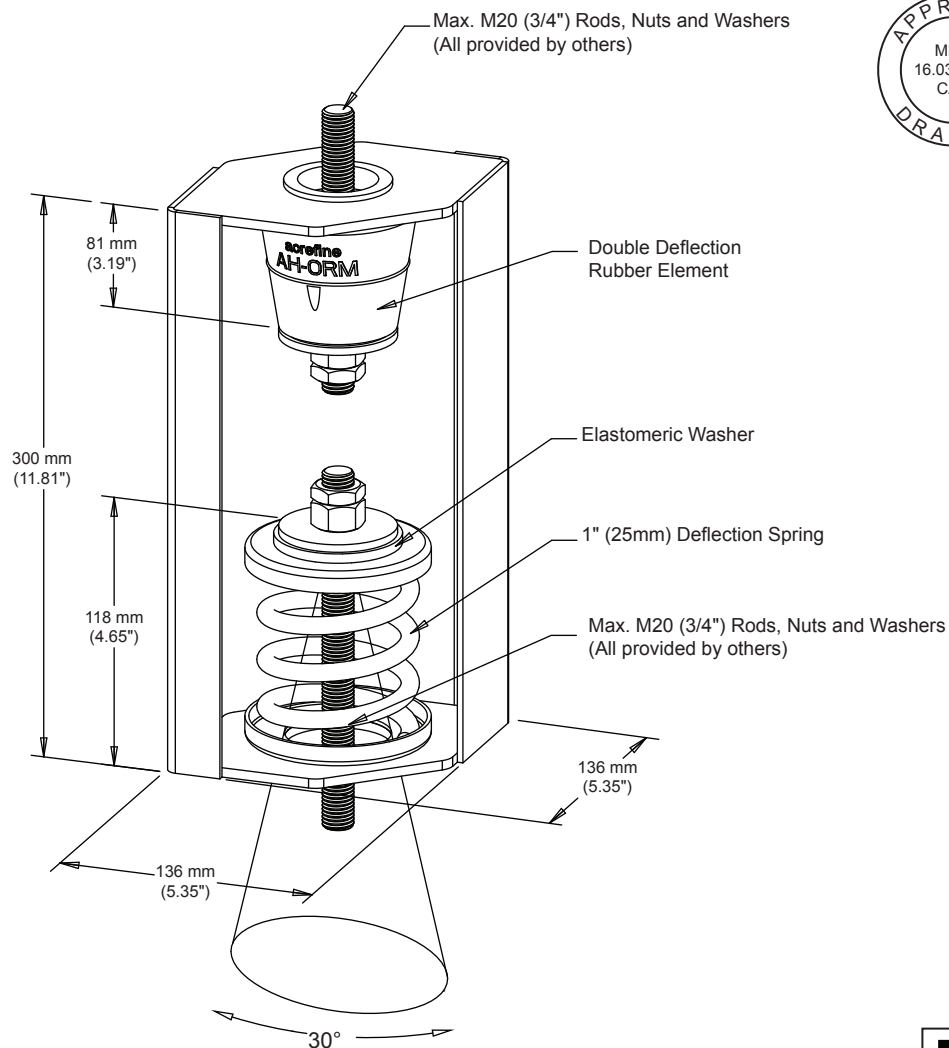

REV	DESCRIPTION	DATE	MADE BY	APP'L
5	Tables updated.	16.03.2022	BK	AY

ISOLATOR PROPERTIES

ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color	AH-OR Share A Hardness
AH-C-1B-70 *	70	154	Green	-	M-40
AH-C-1B-95	95	209	Green	Green	M-40
AH-C-1B-120	120	265	Green	Yellow	M-40
AH-C-1B-140 *	140	309	Yellow	-	M-50
AH-C-1B-165	165	364	Yellow	Green	M-50
AH-C-1B-190	190	419	Yellow	Yellow	M-50
AH-C-1B-230 *	230	507	Blue	-	M-60
AH-C-1B-255	255	562	Blue	Green	M-60
AH-C-1B-280	280	617	Blue	Yellow	M-60
AH-C-1B-370	370	816	Blue	Red	M-70
AH-C-1B-460 *	460	1014	Beige	-	M-70
AH-C-1B-510	510	1125	Beige	Yellow	M-70
AH-C-1B-640 *	640	1411	Red	-	L-70
AH-C-1B-820 *	820	1808	White	-	L-70

* Rod can swing 30 degree.

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9170.

POD PERFORMANCE OUTLINE DRAWING			AH-C-1B Type Combined Hanger with 1" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8252	REV
	ENGINEER				DRAWING BY	MMD	5
	DATE		LOCATION	DATE	07.06.2012		
	PROJECT No.			SCALE	NTS		