


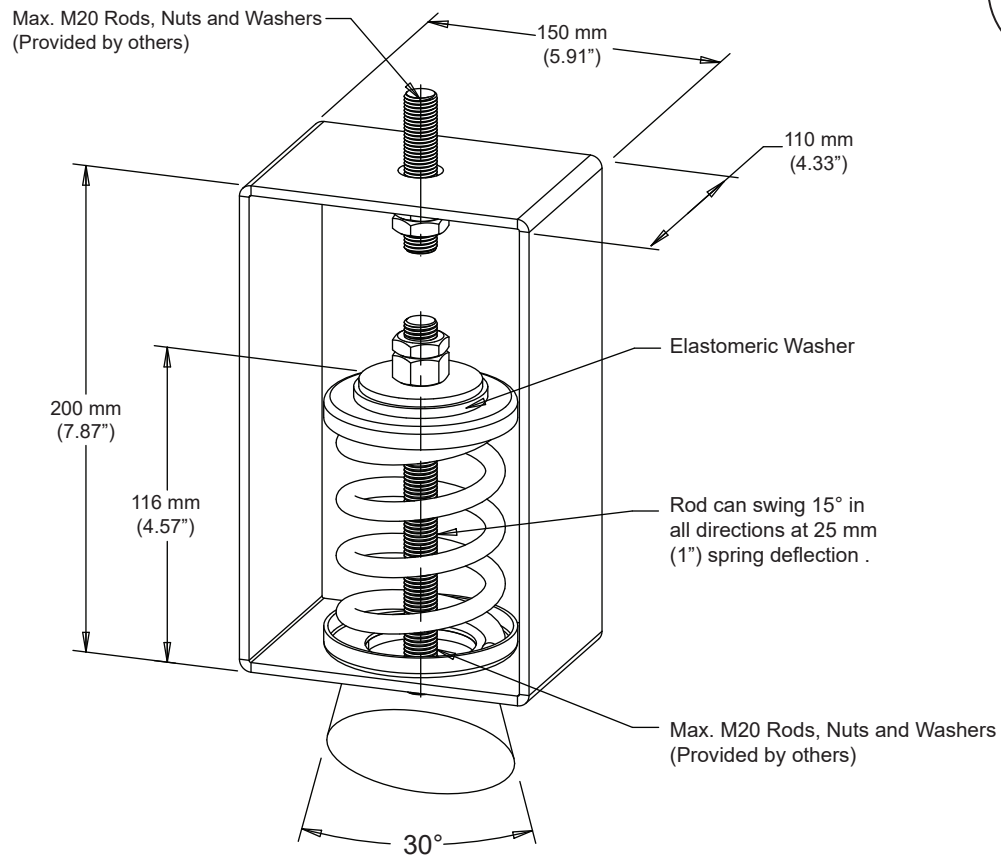

REV	DESCRIPTION	DATE	MADE BY	APP'L
2	Tables updated.	27.04.2016	BK	AY

ISOLATOR PROPERTIES

ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
AH-S-1B-70 *	70	154	Green	-
AH-S-1B-95	95	209	Green	Green
AH-S-1B-120	120	265	Green	Yellow
AH-S-1B-140 *	140	309	Yellow	-
AH-S-1B-165	165	364	Yellow	Green
AH-S-1B-190	190	419	Yellow	Yellow
AH-S-1B-230 *	230	507	Blue	-
AH-S-1B-255	255	562	Blue	Green
AH-S-1B-280	280	617	Blue	Yellow
AH-S-1B-370	370	816	Blue	Red
AH-S-1B-460 *	460	1014	Beige	-
AH-S-1B-510	510	1125	Beige	Yellow
AH-S-1B-640 *	640	1411	Red	-
AH-S-1B-820 *	820	1808	White	-
AH-S-1B-960	960	2117	White	Red
AH-S-1B-1140	1140	2514	White	Orange
AH-S-1B-1280	1280	2822	White	Brown

* Rod can swing 30 degree.

NOTES:

- Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
- Isolator must be installed per Installation Instruction 9160.

POD PERFORMANCE OUTLINE DRAWING			AH-S-1B Type Housed Spring Hanger with 1" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8227	REV
	ENGINEER				DRAWING BY	MMD	
	DATE		LOCATION		DATE	16.02.2010	2
	PROJECT No.				SCALE	NTS	