



THIS DRAWING IS THE PROPERTY OF ACREFINE ENGINEERING AND MUST NOT BE COPIED OR COMMUNICATED TO ANY PERSONS WITHOUT THE PERMISSION OF ACREFINE ENGINEERING. © www.acrefine.com

REV.	DESCRIPTION	DATE	MADE BY	APP'L
0	Released from engineering.	20.06.25	BK	MMD

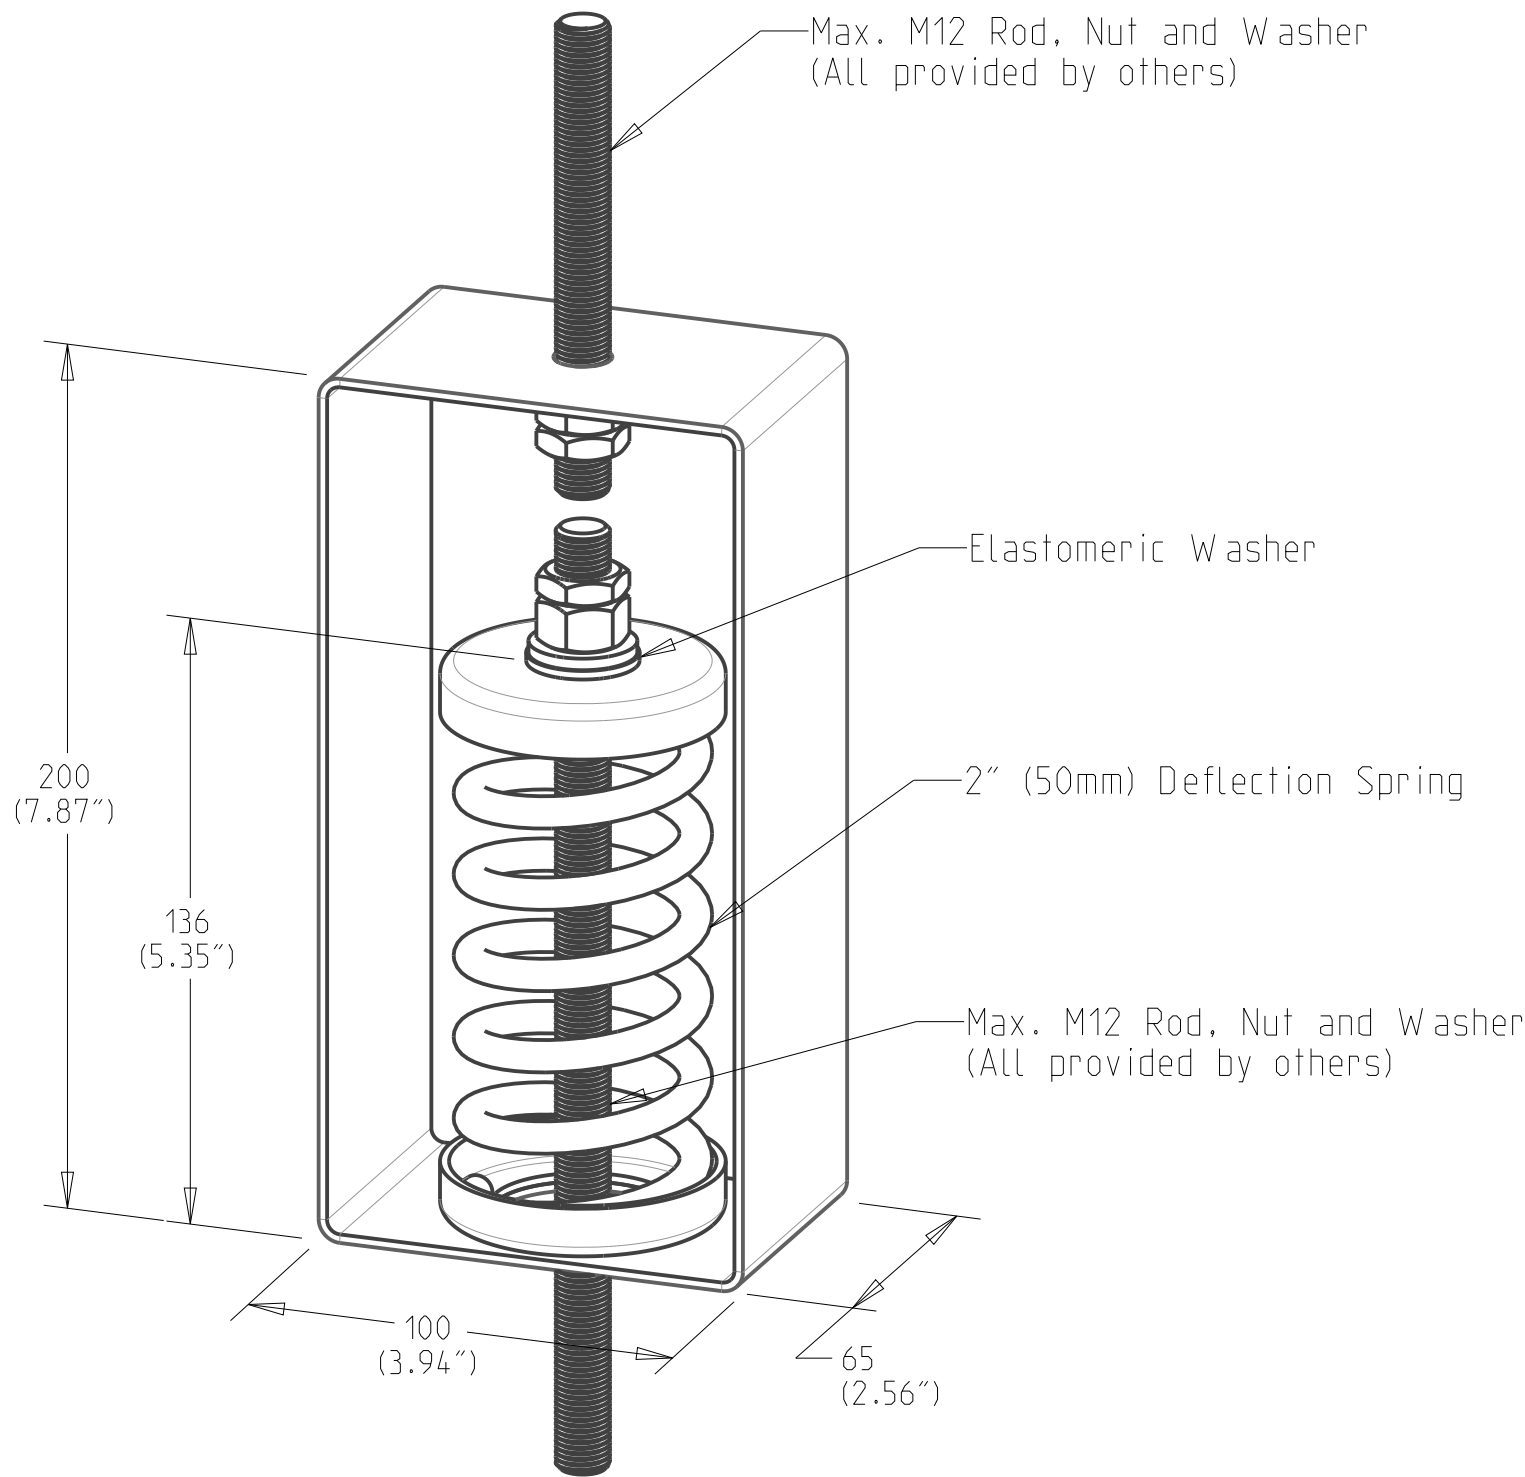

ISOLATOR TYPE	ISOLATOR PROPERTIES		
	Load Capacity (kg)	Load Capacity (lb)	Spring Colour
AH-S-2AA-35	35	77	Grey
AH-S-2AA-50	50	110	Green
AH-S-2AA-70	70	154	Red
AH-S-2AA-95	95	209	White
AH-S-2AA-140	140	309	Black
AH-S-2AA-185	185	408	Brown
AH-S-2AA-230	230	507	Yellow

- Notes:
- Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
 - Isolator must be installed per installation instruction 9160.

POD PERFORMANCE OUTLINE DRAWING			DESCRIPTION AH-S-2AA Type Vibration Hanger. with 2" (50mm) Deflection		 ACREFINE® FIXING & SEISMIC	
PROJECT SUBMITTAL INFORMATION	CUSTOMER		PROJECT	DRAWING No.	8240	REV
	ENGINEER			DRAWN BY	BK	0
	DATE		LOCATION	DATE	20.06.2025	
	PROJECT No.			SCALE	NTS	