
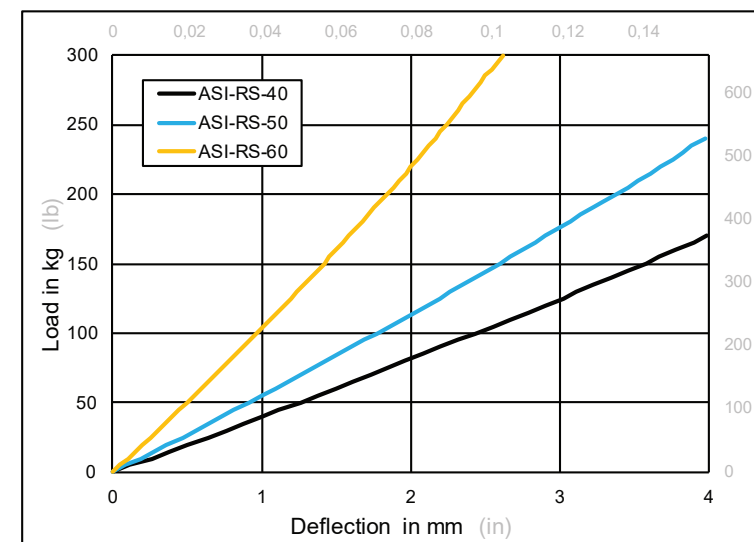


REV	DESCRIPTION	DATE	MADE BY	APPL
3	VI curves, properties added.	12.10.2020	BK	AY

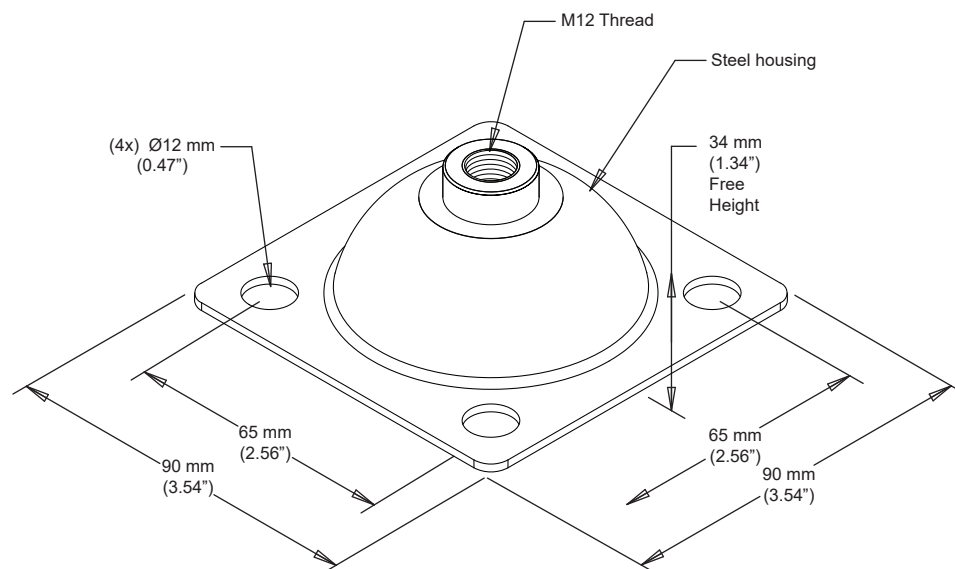

ISOLATOR TYPE	ISOLATOR PROPERTIES					
	Colour Mark	Shore A Hardness	METRIC		IMPERIAL	
			Nominal Deflection (mm)	Load Capacity (kg)	Nominal Deflection (in)	Load Capacity (lb)
ASI-RS-40	No Mark	40	2.2	90	0.09"	198
ASI-RS-50	Blue	50		125		276
ASI-RS-60	Yellow	60		245		540


NOTES:

- Isolator must be installed per Installation Instruction 9050.


POD		ASI-RS Type Restrained Rubber Mount		ACREFINE® FIXING & SEISMIC	
PERFORMANCE OUTLINE DRAWING					
PROJECT INFORMATION	CUSTOMER			DRAWING No.	8050
	ENGINEER			DRAWING BY	MMD
	DATE			DATE	12.10.2020
	PROJECT No.			SCALE	NTS
		PROJECT NAME		REV	
		LOCATION		3	
				Page 1/2	

Vibration Isolation and Noise Control Properties of ASI-RS Type Seismic Isolator


NATURAL FREQUENCY CURVES

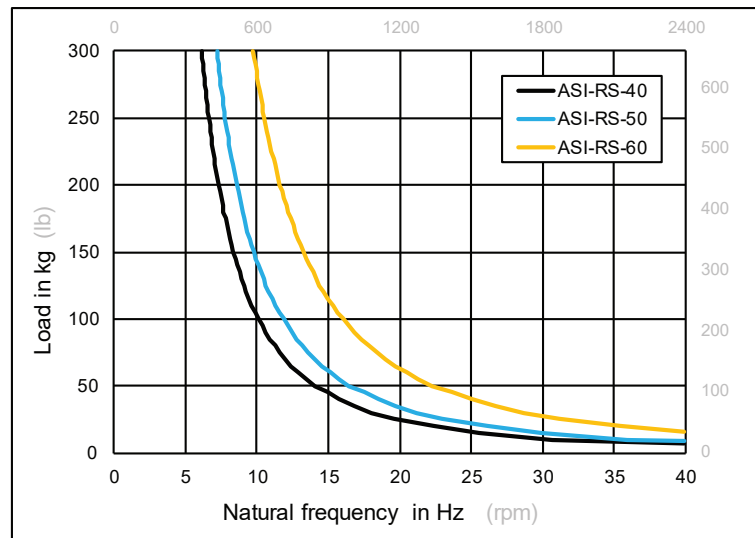

STIFFNESS PROPERTIES

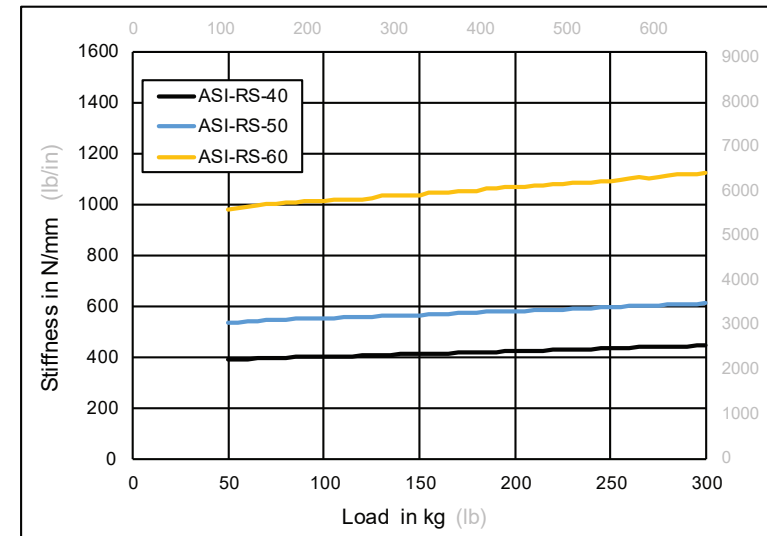

Disclaimer: The Information provided in these technical documents constitute a summary related to the product itself and not the intended application. We do recommend that you seek further advice regarding actual field application from our engineers or authorised partners. Latest version of this document is available to download from www.acrefine.com.

<div>POD</div> <div>PERFORMANCE OUTLINE DRAWING</div>			ASI-RS Type Restrained Rubber Mount		<div>ACREFINE® FIXING & SEISMIC</div>		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8050	REV
	ENGINEER				DRAWING BY	MMD	3
	DATE		LOCATION		DATE	12.10.2020	
	PROJECT No.				SCALE	NTS	