


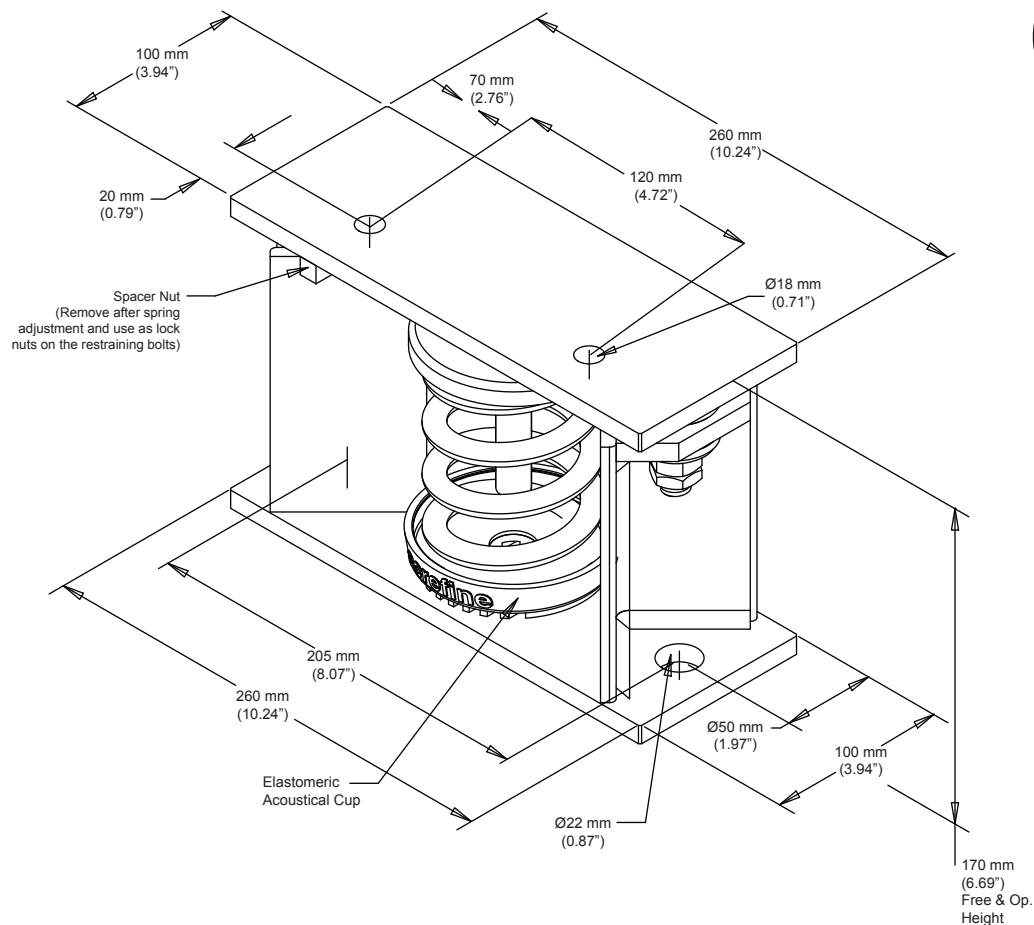

REV	DESCRIPTION	DATE	MADE BY	APP'L
4	Tables updated.	01.02.2017	BK	AY

ISOLATOR PROPERTIES					
ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color	Inner Spring Color
ASI-T1-1B-70	70	154	Green	-	-
ASI-T1-1B-95	95	209	Green	Green	-
ASI-T1-1B-120	120	265	Green	Yellow	-
ASI-T1-1B-140	140	309	Yellow	-	-
ASI-T1-1B-165	165	364	Yellow	Green	-
ASI-T1-1B-190	190	419	Yellow	Yellow	-
ASI-T1-1B-230	230	507	Blue	-	-
ASI-T1-1B-255	255	562	Blue	Green	-
ASI-T1-1B-280	280	617	Blue	Yellow	-
ASI-T1-1B-370	370	816	Blue	Red	-
ASI-T1-1B-460	460	1014	Beige	-	-
ASI-T1-1B-510	510	1125	Beige	Yellow	-
ASI-T1-1B-640	640	1411	Red	-	-
ASI-T1-1B-820	820	1808	White	-	-
ASI-T1-1B-960	960	2117	White	Red	-
ASI-T1-1B-1140	1140	2514	White	Orange	-
ASI-T1-1B-1280	1280	2822	White	Brown	-
ASI-T1-1B-1415	1415	3120	White	Orange	Red
ASI-T1-1B-1555	1555	3428	White	Brown	Red

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9070.
3. For correct installation, refer to the instructional video at: 

<https://www.youtube.com/watch?v=1yJ3hEoF9Ug>



POD PERFORMANCE OUTLINE DRAWING			ASI-T1-1B Type Restrained Isolator with 1" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8102	REV 4
	ENGINEER				DRAWING BY	MMD	
	DATE		LOCATION	DATE	04.02.2010		
	PROJECT No.		SCALE	NTS			