


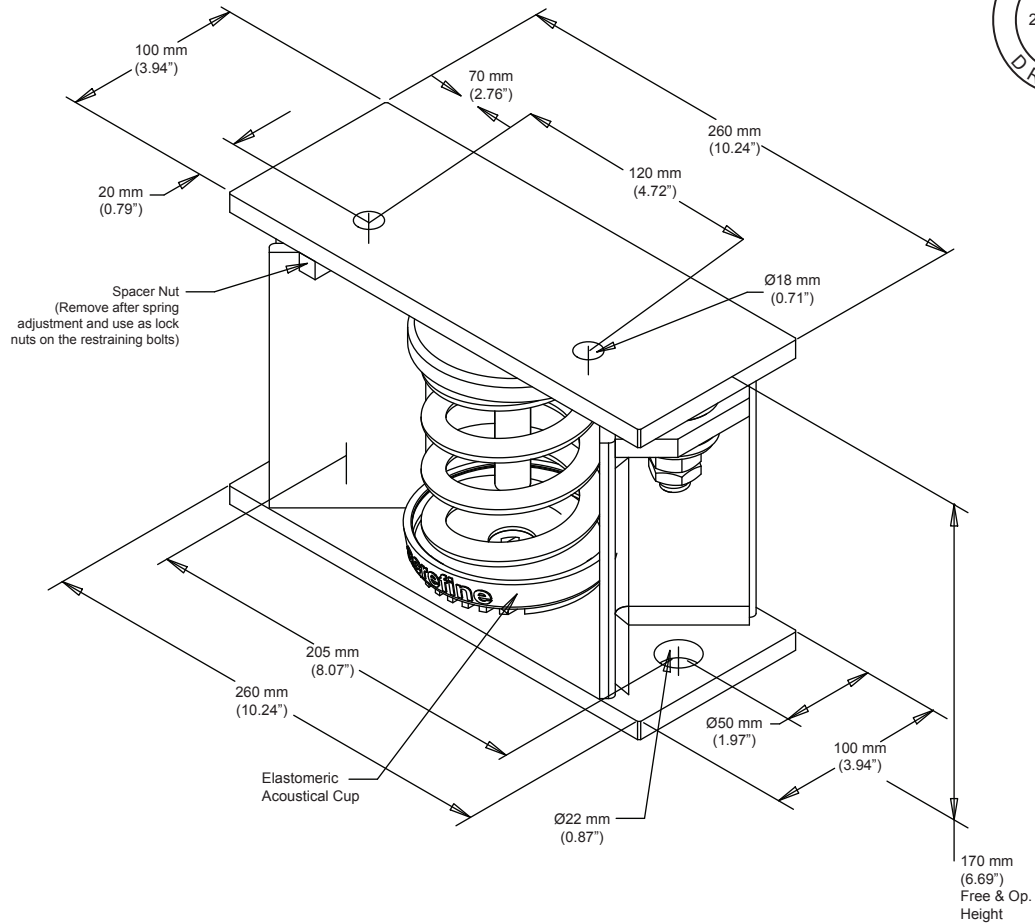

REV	DESCRIPTION	DATE	MADE BY	APP'L
2	Tables updated.	21.04.2016	BK	AY

ISOLATOR PROPERTIES					
ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color	Inner Spring Color
ASI-T1-2A-35	35	77	White	-	-
ASI-T1-2A-60	60	132	Black	-	-
ASI-T1-2A-95	95	209	Green	-	-
ASI-T1-2A-110	110	243	Black	Green	-
ASI-T1-2A-145	145	320	Green	Green	-
ASI-T1-2A-185	185	408	Yellow	-	-
ASI-T1-2A-235	235	518	Yellow	Green	-
ASI-T1-2A-275	275	606	Blue	-	-
ASI-T1-2A-325	325	717	Blue	Green	-
ASI-T1-2A-370	370	816	Beige	-	-
ASI-T1-2A-420	420	926	Beige	Green	-
ASI-T1-2A-460	460	1014	Red	-	-
ASI-T1-2A-550	550	1213	Yellow	Blue	-
ASI-T1-2A-640	640	1411	Blue	Blue	-
ASI-T1-2A-735	735	1621	Beige	Blue	-
ASI-T1-2A-825	825	1819	Red	Blue	-
ASI-T1-2A-975	975	2150	Red	Blue	Black

NOTES:

- Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
- Isolator must be installed per Installation Instruction 9070.
- For correct installation, refer to the instructional video at:

<https://www.youtube.com/watch?v=1yJ3hEoF9Ug>



POD PERFORMANCE OUTLINE DRAWING			ASI-T1-2A Type Restrained Isolator with 2" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8105	REV
	ENGINEER				DRAWING BY	MMD	2
	DATE		LOCATION		DATE	05.02.2010	
	PROJECT No.				SCALE	NTS	