


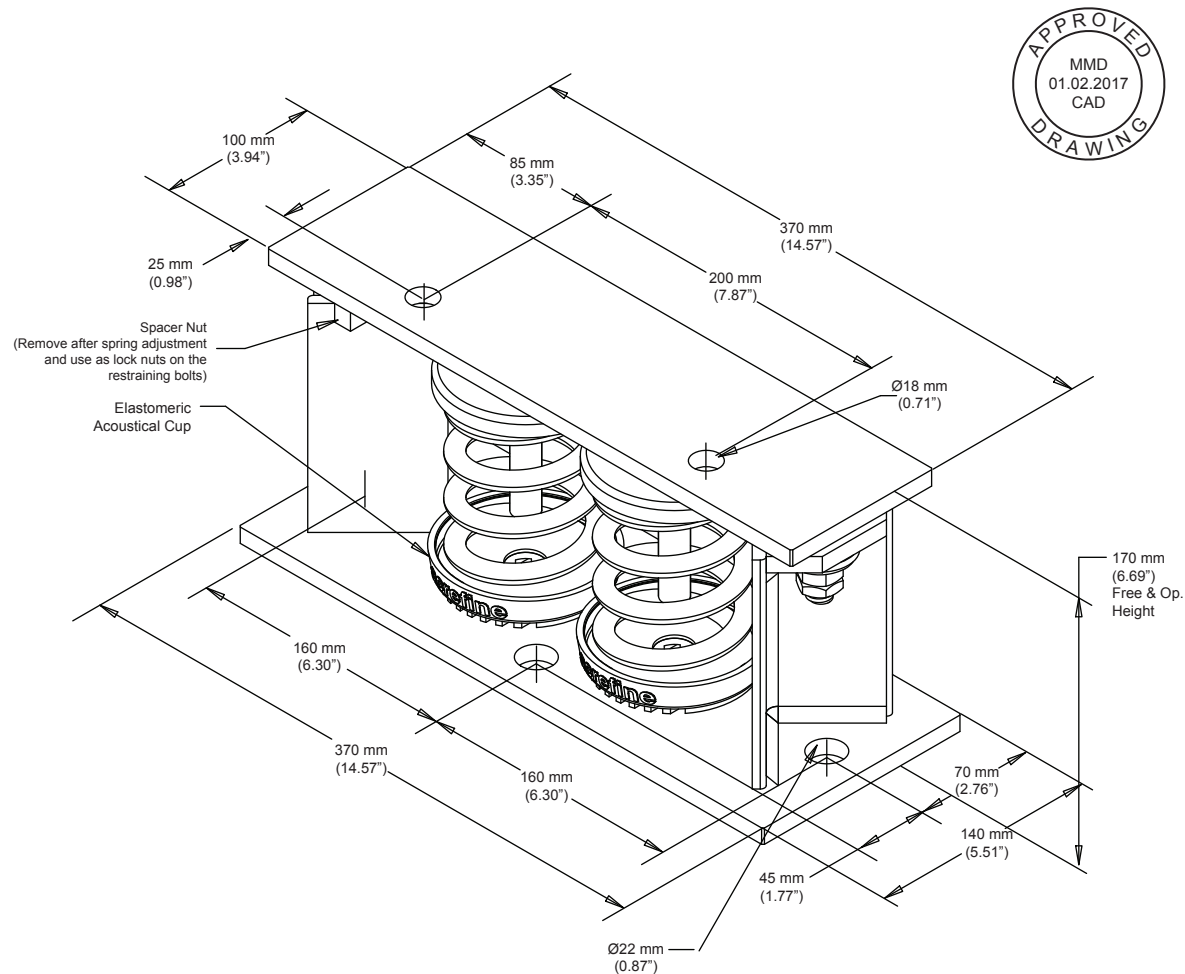

REV	DESCRIPTION	DATE	MADE BY	APP'L
5	Tables updated.	01.02.2017	BK	AY

ISOLATOR PROPERTIES

ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color	Inner Spring Color
ASI-T2-1B-1640	1640	3616	White	-	-
ASI-T2-1B-1920	1920	4234	White	Red	-
ASI-T2-1B-2280	2280	5027	White	Orange	-
ASI-T2-1B-2560	2560	5645	White	Brown	-
ASI-T2-1B-2830	2830	6240	White	Orange	Red
ASI-T2-1B-3110	3110	6856	White	Brown	Red

NOTES:

- Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
- Isolator must be installed per Installation Instruction 9070.
- For correct installation, refer to the instructional video at:

<https://www.youtube.com/watch?v=1yJ3hEoF9Ug>



POD PERFORMANCE OUTLINE DRAWING			ASI-T2-1B Type Restrained Isolator with 1" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8103	REV
	ENGINEER				DRAWING BY	MMD	5
	DATE		LOCATION		DATE	04.02.2010	
	PROJECT No.				SCALE	NTS	