


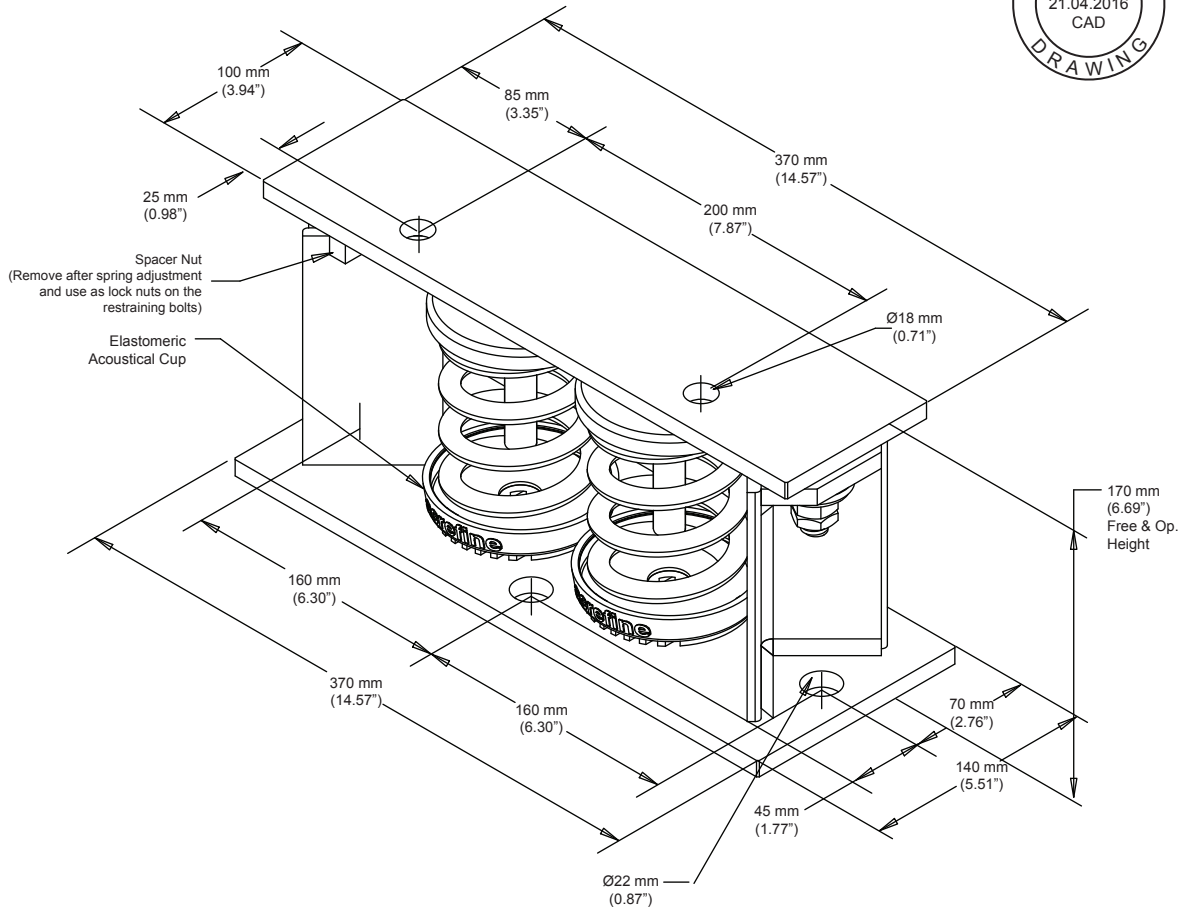

REV	DESCRIPTION	DATE	MADE BY	APP'L
2	Tables updated.	21.04.2016	BK	AY

ISOLATOR PROPERTIES

ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color	Inner Spring Color
ASI-T2-2A-920	920	2029	Red	-	-
ASI-T2-2A-1100	1100	2426	Yellow	Blue	-
ASI-T2-2A-1280	1280	2822	Blue	Blue	-
ASI-T2-2A-1470	1470	3241	Beige	Blue	-
ASI-T2-2A-1650	1650	3638	Red	Blue	-
ASI-T2-2A-1950	1950	4300	Red	Blue	Black

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9070.
3. For correct installation, refer to the instructional video at:

<https://www.youtube.com/watch?v=1yJ3hEoF9Ug>



POD PERFORMANCE OUTLINE DRAWING			ASI-T2-2A Type Restrained Isolator with 2" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8106	REV
	ENGINEER				DRAWING BY	MMD	2
	DATE		LOCATION	DATE	05.02.2010		
	PROJECT No.			SCALE	NTS		