
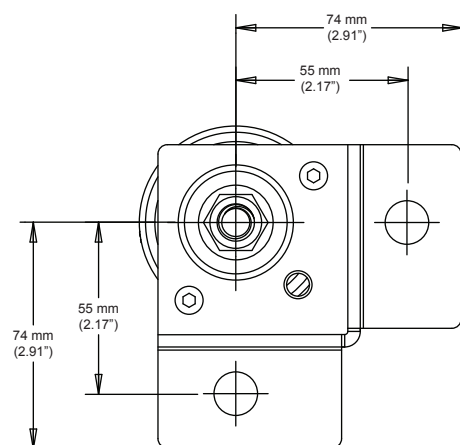


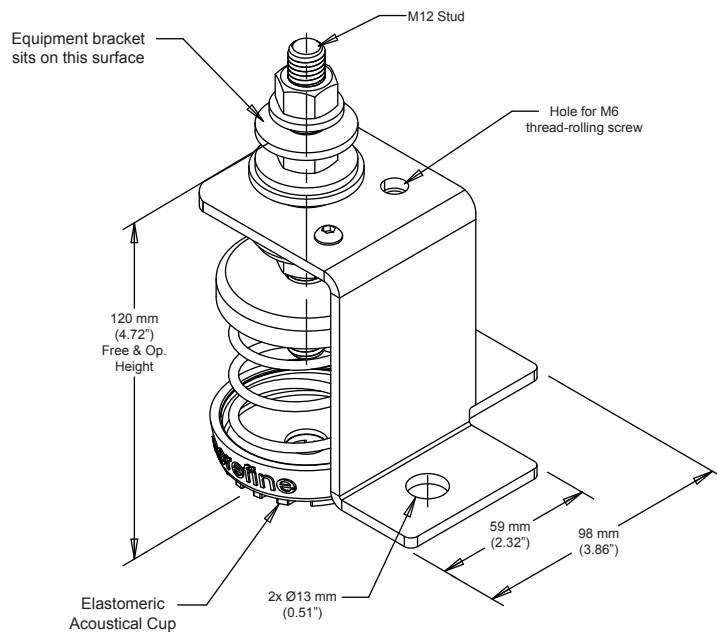

Mounting Detail

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9062.

REV	DESCRIPTION	DATE	MADE BY	APP'L
2	VI curves, properties added.	16.12.2020	BK	AY

ISOLATOR PROPERTIES				
ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
ASI-V-1A-7	7	15	Grey	-
ASI-V-1A-12	12	26	Green	-
ASI-V-1A-25	25	55	Blue	-
ASI-V-1A-50	50	110	Beige	-
ASI-V-1A-70	70	154	Red	-
ASI-V-1A-95	95	209	White	-
ASI-V-1A-140	140	309	Black	-
ASI-V-1A-185	185	408	Yellow	-
ASI-V-1A-230	230	507	Black	Green
ASI-V-1A-275	275	606	Yellow	Green

POD PERFORMANCE OUTLINE DRAWING			ASI-V-1A Type Restrained Isolator with 1" Deflection		ACREFINE[®] FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8085	REV
	ENGINEER				DRAWING BY	MMD	2
	DATE		LOCATION		DATE	16.12.2020	
	PROJECT No.				SCALE	NTS	