



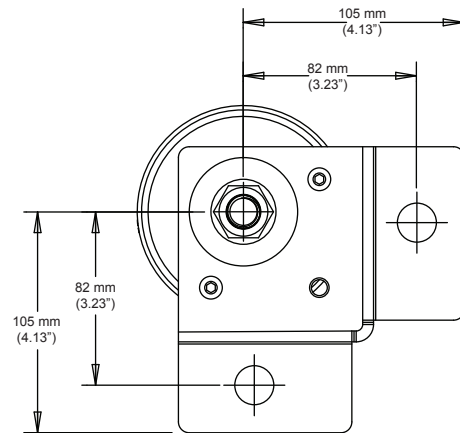

Mounting Detail

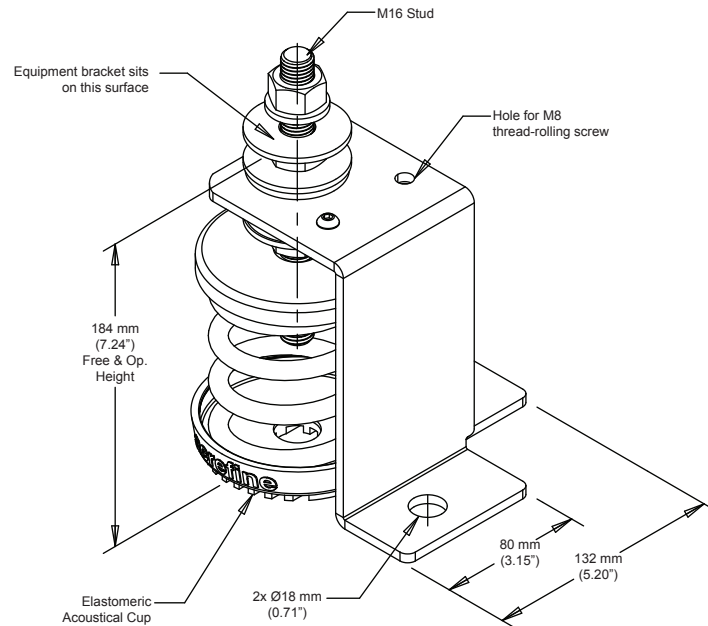

PATENT NO
D777,015

REV	DESCRIPTION	DATE	MADE BY	APP'L
1	Added hole for thread-rolling screws.	20.03.2015	BK	AY

METRIC	ISOLATOR PROPERTIES		
ISOLATOR TYPE	Load Capacity (kg)	Outer Spring Color	Inner Spring Color
ASI-V-1B-70	70	Green	-
ASI-V-1B-95	95	Green	Green
ASI-V-1B-120	120	Green	Yellow
ASI-V-1B-140	140	Yellow	-
ASI-V-1B-165	165	Yellow	Green
ASI-V-1B-190	190	Yellow	Yellow
ASI-V-1B-230	230	Blue	-
ASI-V-1B-255	255	Blue	Green
ASI-V-1B-280	280	Blue	Yellow
ASI-V-1B-370	370	Blue	Red
ASI-V-1B-460	460	Beige	-
ASI-V-1B-510	510	Beige	Yellow
ASI-V-1B-640	640	Red	-
ASI-V-1B-820	820	White	-
ASI-V-1B-960	960	White	Red
ASI-V-1B-1140	1140	White	Orange
ASI-V-1B-1280	1280	White	Brown

IMPERIAL	ISOLATOR PROPERTIES		
ISOLATOR TYPE	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
ASI-V-1B-70	154	Green	-
ASI-V-1B-95	209	Green	Green
ASI-V-1B-120	265	Green	Yellow
ASI-V-1B-140	309	Yellow	-
ASI-V-1B-165	364	Yellow	Green
ASI-V-1B-190	419	Yellow	Yellow
ASI-V-1B-230	507	Blue	-
ASI-V-1B-255	562	Blue	Green
ASI-V-1B-280	617	Blue	Yellow
ASI-V-1B-370	816	Blue	Red
ASI-V-1B-460	1014	Beige	-
ASI-V-1B-510	1125	Beige	Yellow
ASI-V-1B-640	1411	Red	-
ASI-V-1B-820	1808	White	-
ASI-V-1B-960	2117	White	Red
ASI-V-1B-1140	2514	White	Orange
ASI-V-1B-1280	2822	White	Brown

NOTES:

- Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
- Isolator must be installed per Installation Instruction 9062.

POD PERFORMANCE OUTLINE DRAWING			ASI-V-1B Type Restrained Isolator with 1" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8086	REV
	ENGINEER				DRAWING BY	MMD	1
	DATE		LOCATION		DATE	06.08.2014	
	PROJECT No.				SCALE	NTS	