




Mounting Detail

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9062.

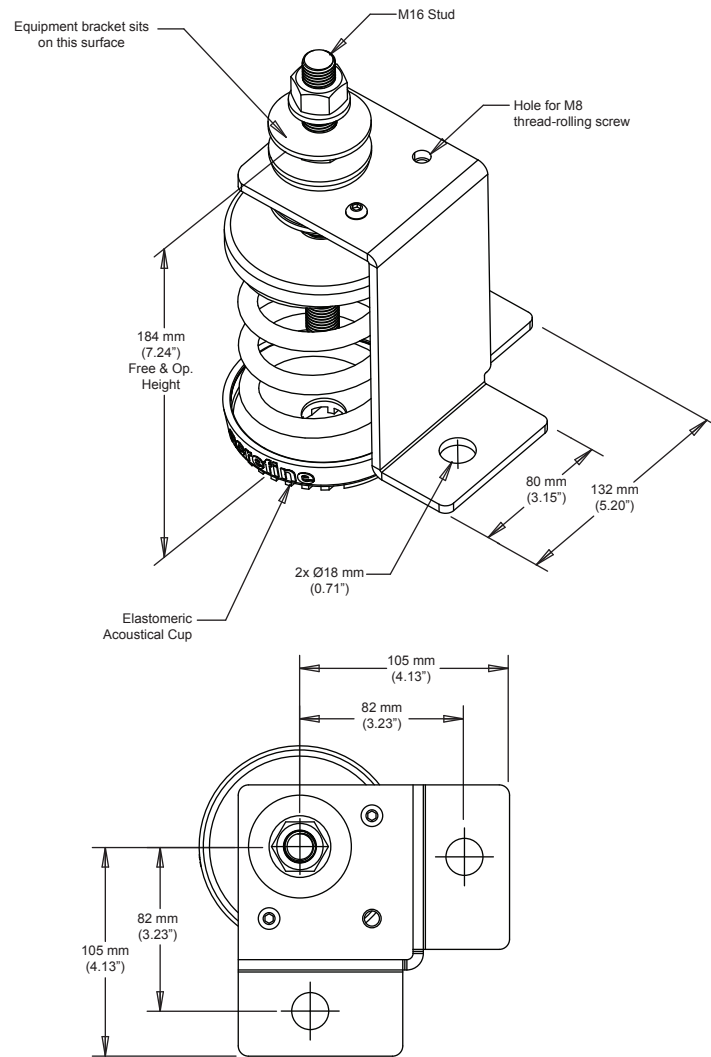

REV	DESCRIPTION	DATE	MADE BY	APP'L
1	Added hole for thread-rolling screws.	20.03.2015	BK	AY

ISOLATOR PROPERTIES

ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
ASI-V-2A-35	35	77	White	-
ASI-V-2A-60	60	132	Black	-
ASI-V-2A-95	95	209	Green	-
ASI-V-2A-110	110	243	Black	Green
ASI-V-2A-145	145	320	Green	Green
ASI-V-2A-185	185	408	Yellow	-
ASI-V-2A-235	235	518	Yellow	Green
ASI-V-2A-275	275	606	Blue	-
ASI-V-2A-325	325	717	Blue	Green
ASI-V-2A-370	370	816	Beige	-
ASI-V-2A-420	420	926	Beige	Green
ASI-V-2A-460	460	1014	Red	-
ASI-V-2A-550	550	1213	Yellow	Blue
ASI-V-2A-640	640	1411	Blue	Blue
ASI-V-2A-735	735	1621	Beige	Blue
ASI-V-2A-825	825	1819	Red	Blue

POD PERFORMANCE OUTLINE DRAWING			ASI-V-2A Type Restrained Isolator with 2" Deflection		ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8087	REV
	ENGINEER				DRAWING BY	MMD	1
	DATE		LOCATION	DATE	06.08.2014		
	PROJECT No.			SCALE	NTS		