


REV	DESCRIPTION	DATE	MADE BY	APP'L
3	VI curves, properties added.	16.12.2020	BK	AY

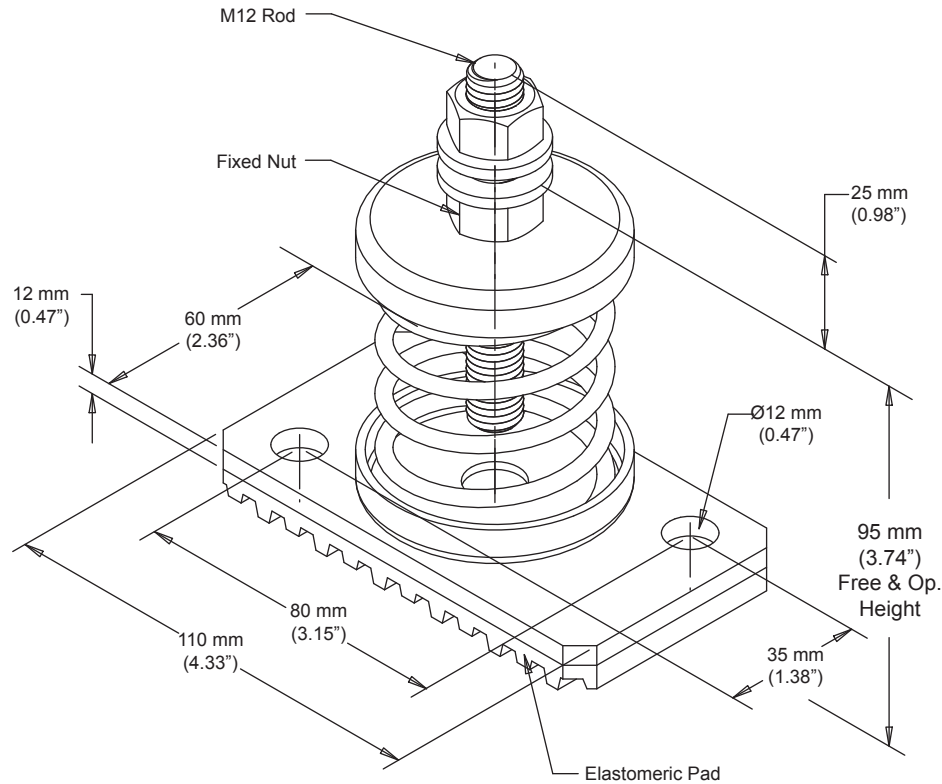

ISOLATOR PROPERTIES				
ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
AVI-B-1A-7	7	15	Grey	-
AVI-B-1A-12	12	26	Green	-
AVI-B-1A-25	25	55	Blue	-
AVI-B-1A-50	50	110	Beige	-
AVI-B-1A-70	70	154	Red	-
AVI-B-1A-95	95	209	White	-
AVI-B-1A-140	140	309	Black	-
AVI-B-1A-185	185	408	Yellow	-
AVI-B-1A-230	230	507	Black	Green
AVI-B-1A-275	275	606	Yellow	Green

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9120.
3. For correct installation, refer to the instructional video at:

<https://www.youtube.com/watch?v=1yJ3hEoF9Ug>



POD		AVI-B-1A Type Open Spring Isolator with 1" Deflection		ACREFINE[®] FIXING & SEISMIC	
PERFORMANCE OUTLINE DRAWING					
PROJECT INFORMATION	CUSTOMER			DRAWING No.	8175
	ENGINEER			DRAWING BY	MMD
	DATE			DATE	16.12.2020
	PROJECT No.			SCALE	NTS
		PROJECT NAME		REV	
		LOCATION		3	
				Page 1/2	