


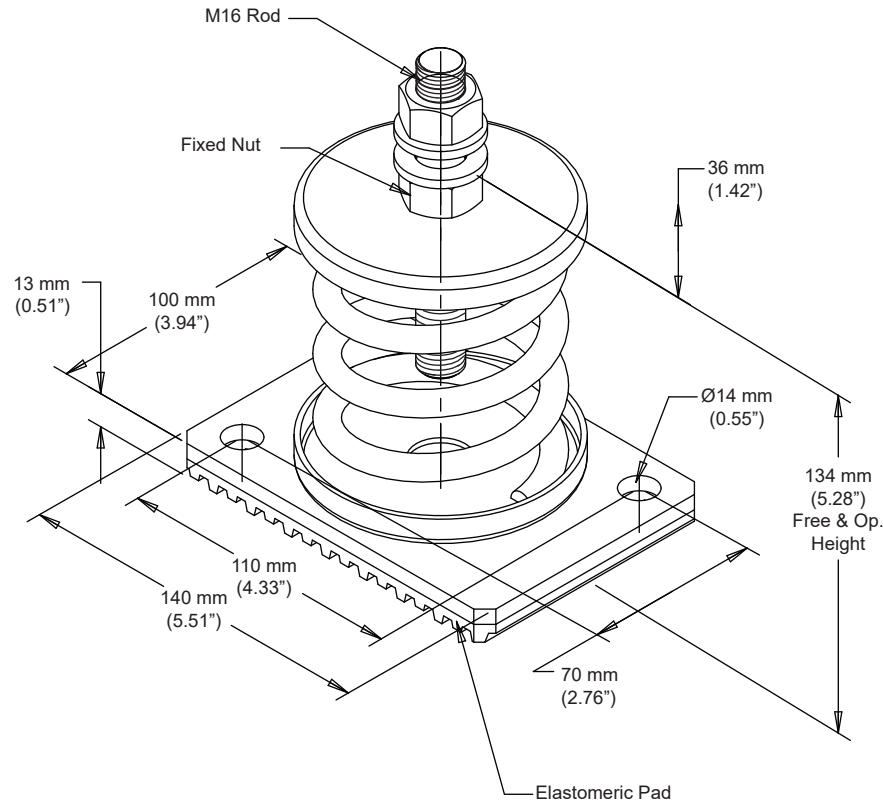

REV	DESCRIPTION	DATE	MADE BY	APP'L
3	Tables updated.	28.04.2016	BK	AY

ISOLATOR PROPERTIES				
ISOLATOR TYPE	Load Capacity (kg)	Load Capacity (lb)	Outer Spring Color	Inner Spring Color
AVI-B-1B-70	70	154	Green	-
AVI-B-1B-95	95	209	Green	Green
AVI-B-1B-120	120	265	Green	Yellow
AVI-B-1B-140	140	309	Yellow	-
AVI-B-1B-165	165	364	Yellow	Green
AVI-B-1B-190	190	419	Yellow	Yellow
AVI-B-1B-230	230	507	Blue	-
AVI-B-1B-255	255	562	Blue	Green
AVI-B-1B-280	280	617	Blue	Yellow
AVI-B-1B-370	370	816	Blue	Red
AVI-B-1B-460	460	1014	Beige	-
AVI-B-1B-510	510	1125	Beige	Yellow
AVI-B-1B-640	640	1411	Red	-
AVI-B-1B-820	820	1808	White	-
AVI-B-1B-960	960	2117	White	Red
AVI-B-1B-1140	1140	2514	White	Orange
AVI-B-1B-1280	1280	2822	White	Brown

NOTES:

1. Specified Load Capacity is the max. allowable load for a single isolator and this value must not be exceeded.
2. Isolator must be installed per Installation Instruction 9120.

POD PERFORMANCE OUTLINE DRAWING			AVI-B-1B Type Open Spring Isolator with 1" Deflection		 ACREFINE® FIXING & SEISMIC		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8176	REV 3
	ENGINEER				DRAWING BY	MMD	
	DATE		LOCATION		DATE	12.03.2010	
	PROJECT No.				SCALE	NTS	