
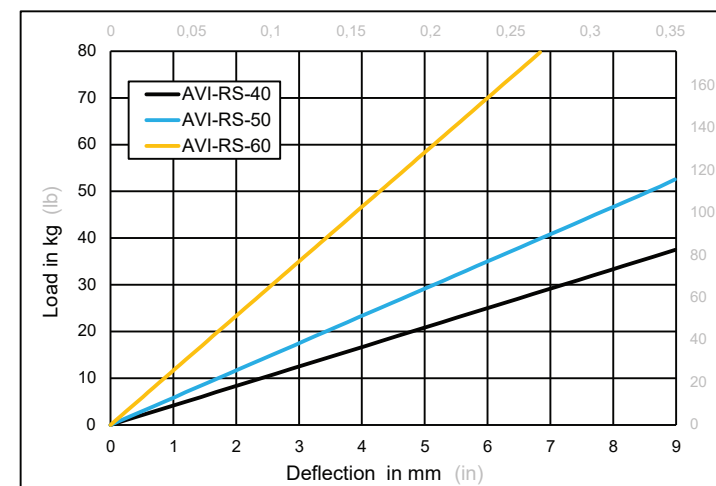


REV	DESCRIPTION	DATE	MADE BY	APP'L
4	VI curves, properties added.	12.10.2020	BK	AY

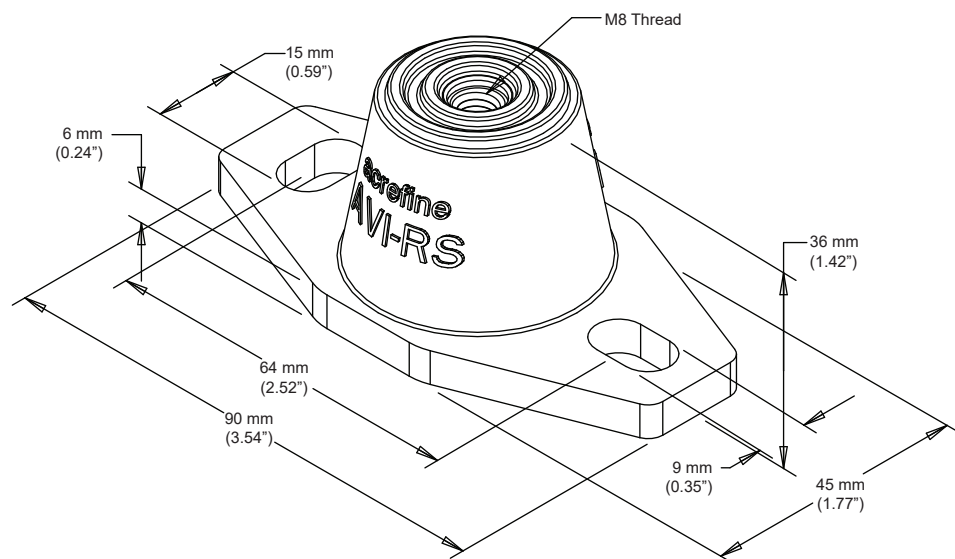

ISOLATOR TYPE	ISOLATOR PROPERTIES					
	Colour Mark	Shore A Hardness	METRIC		IMPERIAL	
			Nominal Deflection (mm)	Load Capacity (kg)	Nominal Deflection (in)	Load Capacity (lb)
AVI-RS-40	No Mark	40	6	25	0.24"	55
AVI-RS-50	Blue	50		35		77
AVI-RS-60	Yellow	60		70		154


NOTES:

- Isolator must be installed per Installation Instruction 9100.


POD PERFORMANCE OUTLINE DRAWING		AVI-RS Type Open Rubber Mount			
PROJECT INFORMATION	CUSTOMER	PROJECT NAME		DRAWING No.	8125
	ENGINEER			DRAWING BY	MMD
	DATE	LOCATION		DATE	12.10.2020
	PROJECT No.			SCALE	NTS
				REV	4
				Page 1/2	

Vibration Isolation and Noise Control Properties of AVI-RS Type Rubber Mount


NATURAL FREQUENCY CURVES

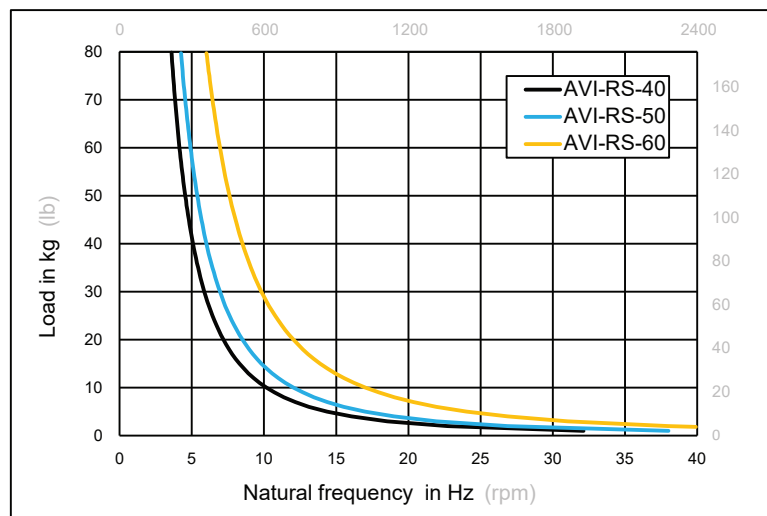

STIFFNESS PROPERTIES

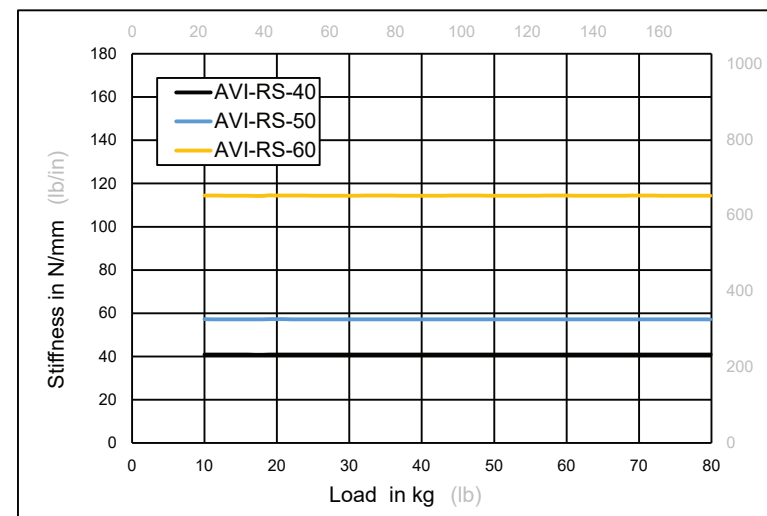

Disclaimer: The Information provided in these technical documents constitute a summary related to the product itself and not the intended application. We do recommend that you seek further advice regarding actual field application from our engineers or authorised partners. Latest version of this document is available to download from www.acrefine.com.

<div>POD</div> <div>PERFORMANCE OUTLINE DRAWING</div>			AVI-RS Type Open Rubber Mount		<div>ACREFINE</div> <div>FIXING & SEISMIC</div>		
PROJECT INFORMATION	CUSTOMER		PROJECT NAME		DRAWING No.	8125	REV
	ENGINEER				DRAWING BY	MMD	4
	DATE		LOCATION	DATE	12.10.2020		
	PROJECT No.			SCALE	NTS	Page 2/2	